



DIRECTIONAL LIGHTS

DL-46-LEDM20



TYPE



SPECIFICATIONS

CONSTRUCTION: Cast aluminum or cast brass integrated heat sink base; matching cast adjustable swivel with 240° rotation; extruded aluminum or brass housing

LENS: High impact clear tempered convex glass

O-RING: 2x High temperature red silicone

LIGHT SOURCE: Integrated 1500 lumen 20w LED module (equivalent to 100w halogen) with 6 high power LEDs; 50,000 hours average rating. 3000k color temperature. 5 year warranty

OPTICS: Interchangeable spot (15°), flood (40°), wide flood (60°) and 160° very wide flood (no optics)

12v DRIVER: Integrated on-board, no external driver required. 12v AC/DC input

WIRING: Black 3 foot 18/2 zip cord from base of fixture (12v only)
For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)


MOUNTING: Aluminum model: FA-03 black 9" ABS stake, tapped 1/2" NPS
Brass & Copper models: FA-03-LG large black 9" ABS stake, tapped 1/2" NPS

FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available.
Brass - Unfinished. Optional finishes available.



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
DL-46-LEDM2015-BLT	Aluminum Bullet, 15° Optics	20w LED Module	3.0 lbs.
DL-46-LEDM2040-BLT	Aluminum Bullet, 40° Optics	20w LED Module	3.0 lbs.
DL-46-LEDM2060-BLT	Aluminum Bullet, 60° Optics	20w LED Module	3.0 lbs.
DL-46-LEDM20WF-BLT	Aluminum Bullet, No Optics	20w LED Module	3.0 lbs.
DL-46-LEDM2015-BRS	Brass Bullet, 15° Optics	20w LED Module	5.0 lbs.
DL-46-LEDM2040-BRS	Brass Bullet, 40° Optics	20w LED Module	5.0 lbs.
DL-46-LEDM2060-BRS	Brass Bullet, 60° Optics	20w LED Module	5.0 lbs.
DL-46-LEDM20WF-BRS	Brass Bullet, No Optics	20w LED Module	5.0 lbs.

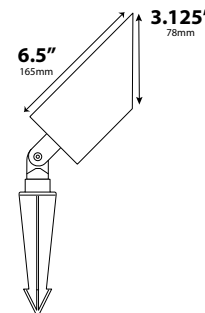

Beam Type	Angle	Visual Indicator
Spot	15°	Red Dot
Flood	40°	Green Dot
Wide Flood	60°	Blue Dot



BEAM/GLARE CONTROL ACCESSORIES

FA-08-DL-42-21	Round 1/4" Hex Cell Louver
FA-35-DL-42-GREEN	Green Acrylic Insert Lens
FA-11-DL-42-BLUE	Blue Tempered Glass Insert Lens
FA-11-DL-42-GREEN	Light Green Tempered Glass Insert Lens
FA-11-DL-42-AMBER	Amber Tempered Glass Insert Lens
FA-11-DL-42-RED	Red Tempered Glass Insert Lens
FA-104-DL-42-SB	Wide Spread Sandblasted Glass Insert Lens Softener



JOB INFORMATION

Type: _____ Date: _____

Job Name: _____

Cat. No.: _____

Lamp(s): _____

Specifier: _____

Contractor: _____

Notes: _____

FOCUS INDUSTRIES INC.®
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT




DIRECTIONAL LIGHTS


DL-46-LEDM20

TYPE


MOUNTING ACCESSORIES

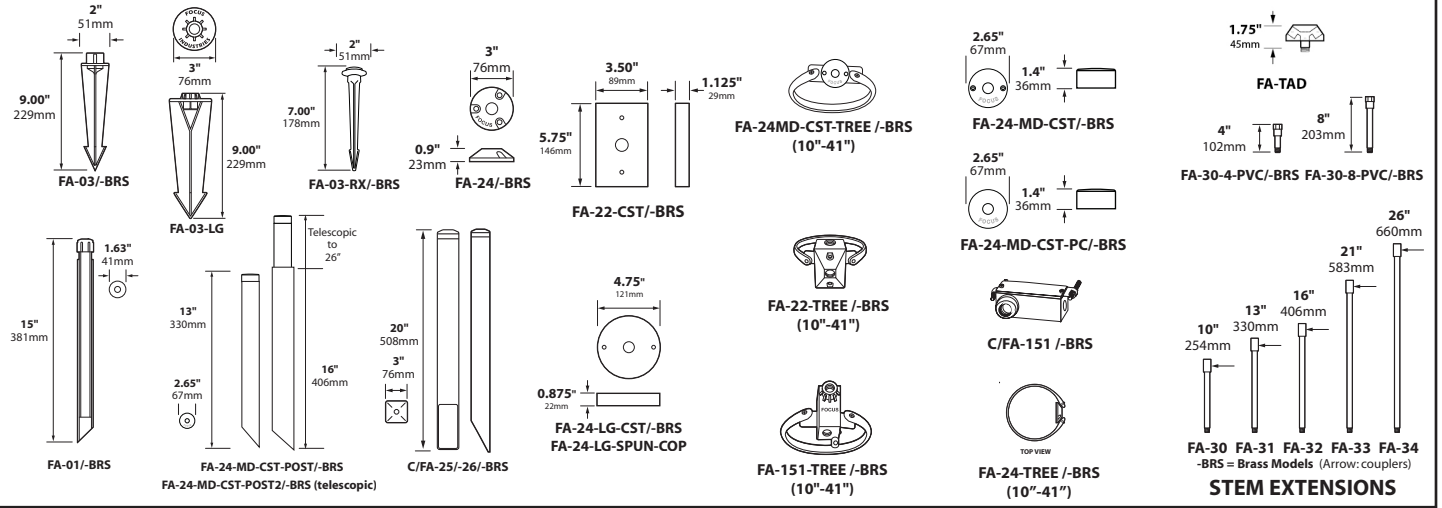


LIGHT DISTRIBUTIONS AND PHOTOMETRICS

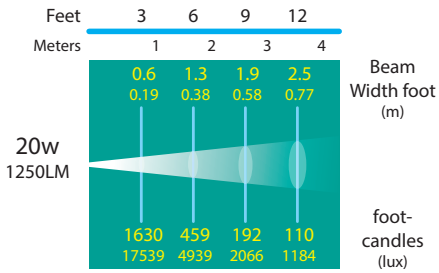

DL-46-LEDM2015

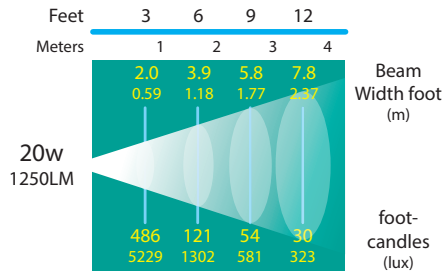

DL-46-LEDM2040

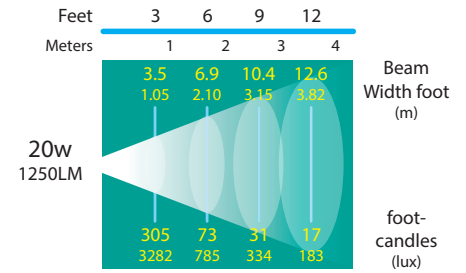

DL-46-LEDM2060